


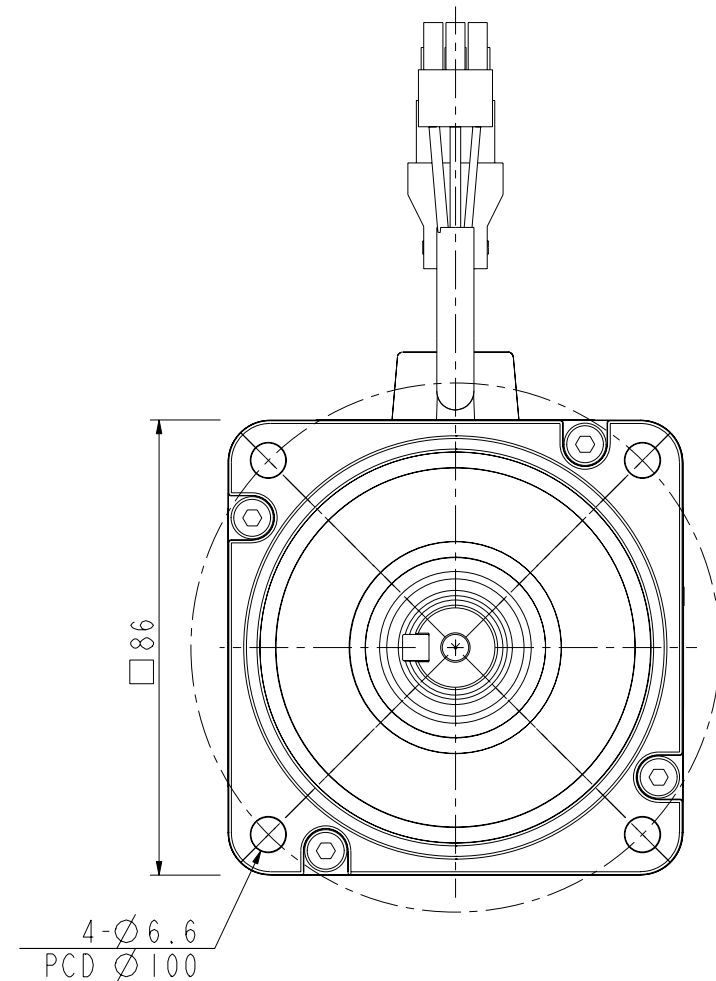
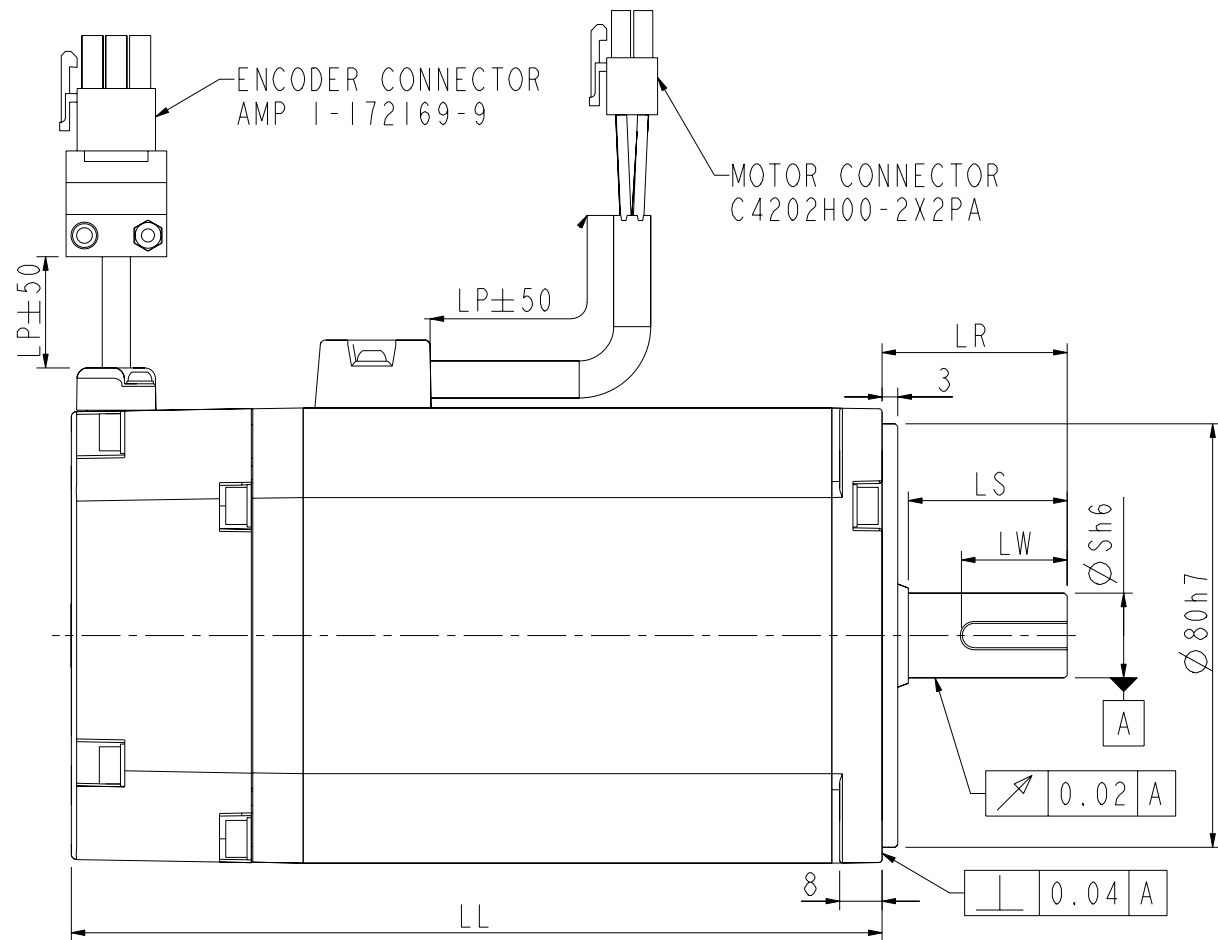


1

2

3

4

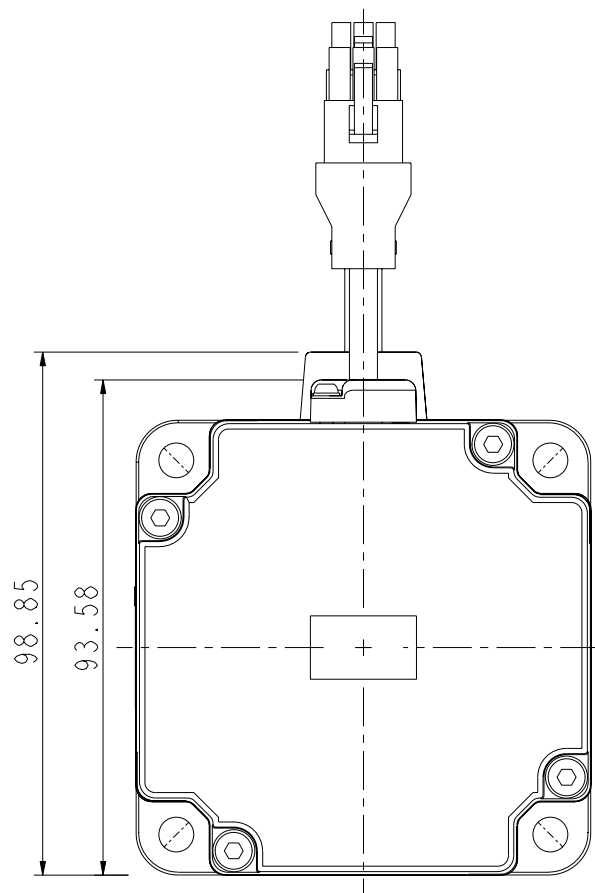


DIMENSION TABLE (MODEL WITHOUT BRAKE)


MODEL	LL	LR	LS	LW	S	LV	U	TAPER	WK	W	T	RH	TP	LP	LE
ECMA-C30910PC	153.2	35	30	20	16	—	—	—	5	5	5	13	M5XP0.8	3000	3000

ENCODER CONNECTOR		
PIN No.	FUNCTION	
	2500ppr	COLOR
1	A	BLK
2	B	WHT
3	Z	ORG
4	A	BLK/RED
5	B	WHT/RED
6	Z	ORG/RED
7	DC+5V	BRN
8	GND	BLU
9	SHIELD	SHIELD


MOTOR CONNECTOR		
PIN No.	FUNCTION	COLOR
1	U	RED
2	V	WHT
3	W	BLK
4	GND	GRN/YEL

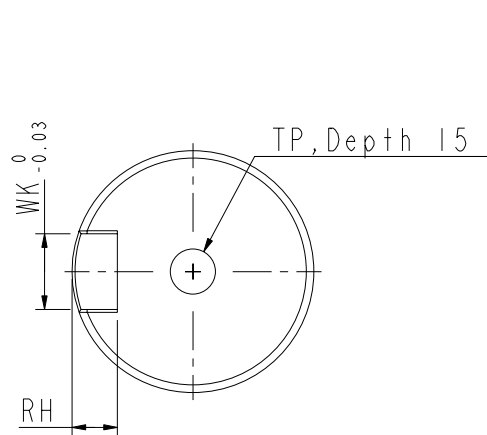

SHAFT END DETAILS

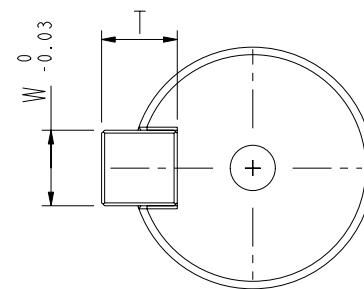

KEY DETAILS

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.	DRAWN:	DESIGN:		
DATE:	ECN NO.:			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.				
DRAWING NAME: ECMA-C30910PC		PART NO.:		
USED ON ECMA-XX09XXXX		REV.		
UNIT mm		SCALE 1.000		
SHEET 1 OF 1				

DIMENSIONAL TOLERANCES

DECIMALS	0~4	±0.05	<50	±0.1	<50	±0.5	<30°	±0.1°
X	±0.3	4~16	±0.08	>50~100 ±0.15	>50~100 ±1.0	>30°~60° ±0.3°		
X.X	±0.2	16~63	±0.12	>100~200 ±0.2	>100~200 ±1.5	>60°~90° ±0.5°		
X.XX	±0.1	63~200	±0.2	>200~ ±0.2%	>200~ ±0.3%			