


/

*

1.

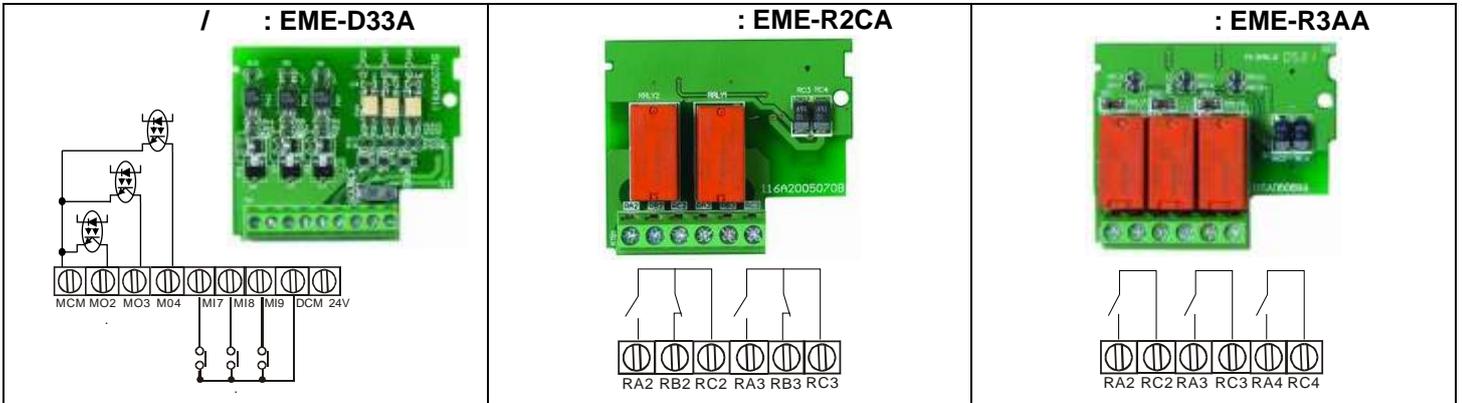

2.

*

(-)

*

*

*

EME-D33A: 2 *

EME-R2CA/EME-R3AA: 5 *

*

EME-D33A: 16~24 AWG (0.2 - 1.3 2)

EME-R2CA/EME-R3AA: 12~24 AWG (0.2 - 3.3 2)

*



*

11. 5

3.

* : -10 °C ... 40°C ().

* : 90%RH ().

* :

• 1000 .

• , .

* : 9.80665 / ²(1G) 20 5.88 / ²(0.6G) 20 50 .

* / :

• EME-D33A: MI7~MI9: : 16 .

: 10

MO2~MO4: 48 , 50 .

• EME-R2CA: : A. : 5A(N.O.)/3A(N.C.) 240VAC, 5A(N.O.)/3A(N.C.) 24VDC

B. : 1.5A(N.O.)/0.5A(N.C.) 240VAC, 1.5A(N.O.)/0.5A(N.C.) 24VDC.

• EME-R3AA: : . 250VAC/6A

4.

* (RC-) ,

*

* . ().

*

* (, .)

15 .

*

* VFD-E.